

Product information

Product Description

Danalogic i-FIT is a family of highly advanced hearing instruments. Designed to compensate for all hearing losses, Analogic i-FIT delivers high-performance speech clarity - even in the most demanding listening situations.


Fitting Requirements

- Aventa™ fitting software version 2.8 or higher
- Programming adaptor boot with CS44 cable
- Speedlink™, HI-PRO or NOAHlink interface (Speedlink recommended)

i-FIT 71-DVI



Fitting Range

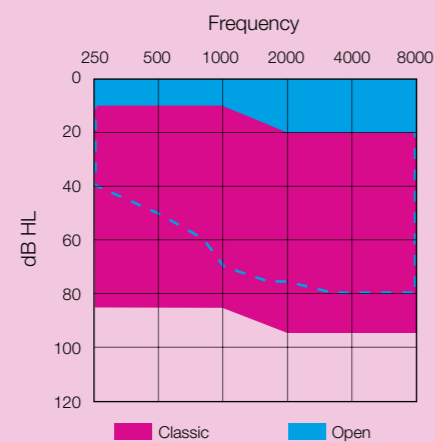

Key Features

- 17-band WARP™
- Noise Reduction
- Dual Stabilizer™ II DFS with Feedback Eliminator
- Situation Analyser
- Integrated wind noise suppression
- Intelligent Directionality with Autofocus
- Fixed directionality
- SoftSwitching™
- EchoStop™
- Up to 4 customisable programmes
- Impulse Noise Smoother
- SmartStart™
- Onboard Analyser™ data logging
- Acoustic indications of user controls and low battery warning

Standard Configuration

- iSolate™ humidity protection
- Dual Microphone Technology
- Size 13 battery
- Push button
- Programmable volume control
- Telecoil with T and MT modes
- Direct Audio Input facility
- Tubing and domes in different sizes for open fit option

Patents pending.

All specifications are subject to change without notice.

17035381-GB-09.06 Rev.A

United Kingdom

GN ReSound Ltd.
1 Landscape Close
Weston Business Park
Weston-on-the-Green
Oxon OX25 3SX
Tel: 01869 352800
Fax: 01869 343466
www.danalogic-ifit.com

Worldwide headquarters







GN ReSound A/S
Lautrupbjerg 7 • P.O. Box 130
DK-2750 Ballerup, Denmark
Tel.: +45 45 75 11 11
Fax: +45 45 75 11 19
www.resound.com

Technical Specifications



		i-FIT 71 DVI		
		IEC 118-0 Ear Simulator	IEC 118-7 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz / HFA	45	48	dB
Full-on gain (50 dB SPL input)	Max.	63	56	dB
	1600 Hz / HFA	55	51	dB
Maximum output (90 dB SPL input)	Max.	133	126	dB SPL
	1600 Hz / HFA	131	125	dB SPL
Total harmonic distortion	800 Hz	0,9	1,2	%
	1600 Hz	0,5	0,5	%
Telecoil sensitivity (1 mA/m input)	Max.	95	-	dB SPL
Full-on Telecoil sensitivity @1 mA/m, MASL (IEC)	HFA	-	83	dB SPL
HFA - SPLITS @ 31.6 mA/m (ANSI)	HFA	-	108	dB SPL
Equivalent input noise, w/o Noise reduction		28	25	dB SPL
1/3 Octave Equivalent Input Noise, w/o Noise reduction		14	-	dB SPL
Frequency range (DIN 45605)		100 - 7070	100 - 6620	Hz
Current Drain		0,9	0,9	mA
Typical Battery life time (Battery type 13)		330	330	hrs

Data in accordance with IEC 60118-0, IEC 60118-7, Supply Voltage 1.3 V.

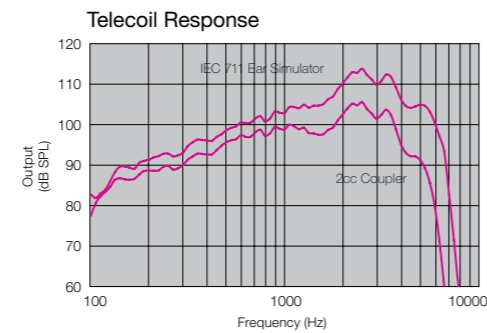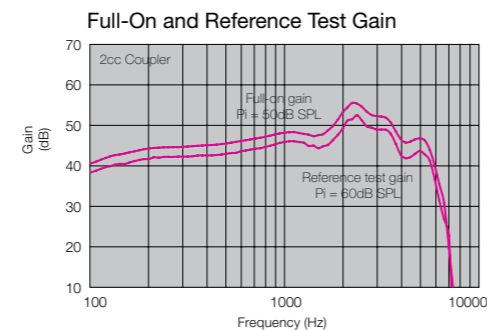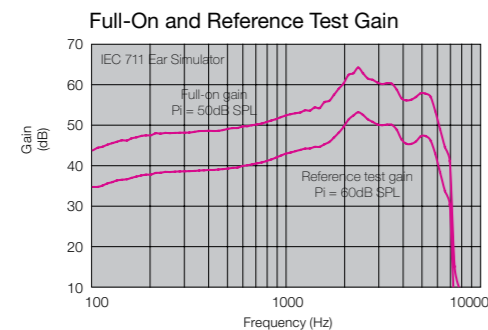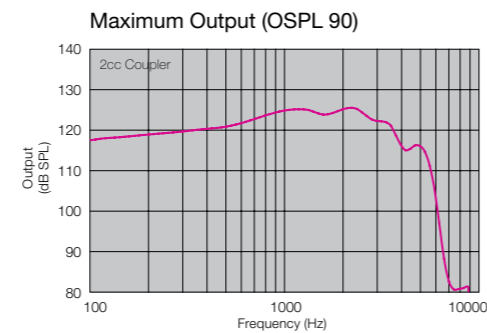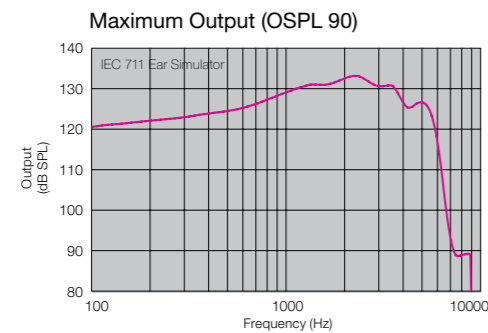

Full-On Gain Parameter Settings*

	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[80]	37	37	37	38	38	38	36	32	32
G[50]	46	46	46	46	46	51	45	43	43

Reference Test Gain Parameter Settings for 118-0*

	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[80]	37	37	37	38	38	38	36	32	32
G[50]	46	46	46	46	46	51	45	43	43

Reference Test Gain Parameter Settings for ANSI and 118-7*

	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[80]	30	30	30	31	31	31	29	25	25
G[50]	39	39	39	39	39	44	38	36	36







*Settings in accordance with Aventa fitting software

Technical Specifications



		i-FIT 71 DVI Open		
		IEC 118-0 Ear Simulator	IEC 118-7 2cc coupler	
Reference test gain (60 dB SPL input)	1600 Hz / HFA	42	42	dB
Full-on gain (50 dB SPL input)	Max.	58	49	dB
	1600 Hz / HFA	52	45	dB
Maximum output (90 dB SPL input)	Max.	133	129	dB SPL
	1600 Hz / HFA	127	120	dB SPL
Total harmonic distortion	800 Hz	0,2	0,2	%
	1600 Hz	0,9	0,8	%
Telecoil sensitivity (1 mA/m input)	Max.	88	-	dB SPL
Full-on Telecoil sensitivity @1 mA/m, MASL (IEC)	HFA	-	77	dB SPL
HFA - SPLITS @ 31.6 mA/m (ANSI)	HFA	-	105	dB SPL
Equivalent input noise, w/o Noise reduction		26	26	dB SPL
1/3 Octave Equivalent Input Noise, w/o Noise reduction		14	-	dB SPL
Frequency range (DIN 45605)		100 - 7090	100 - 6070	Hz
Current Drain		0,9	0,9	mA
Typical Battery life time (Battery type 13)		322	322	hrs

Data in accordance with IEC 60118-0, IEC 60118-7, Supply Voltage 1.3 V.

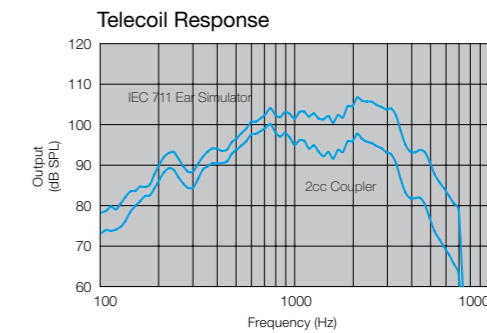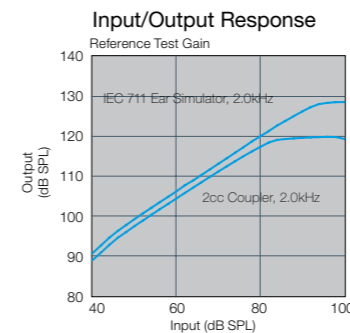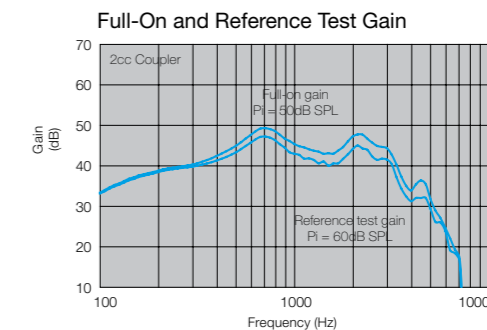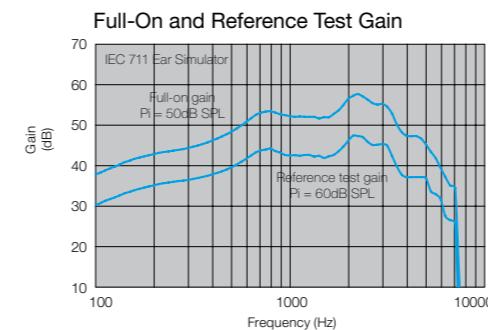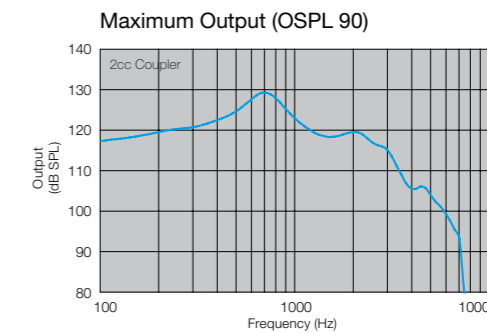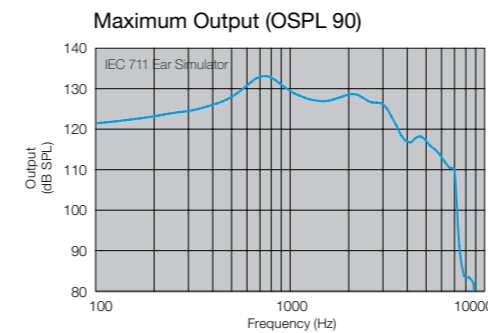

Full-On Gain Parameter Settings*

	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[80]	40	40	40	40	37	42	32	28	26
G[50]	42	45	48	48	44	52	42	35	30

Reference Test Gain Parameter Settings for 118-0*

	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[80]	33	33	33	33	30	35	25	21	19
G[50]	35	38	41	41	37	45	35	28	23

Reference Test Gain Parameter Settings for ANSI and 118-7*

	250 Hz	500 Hz	750 Hz	1 kHz	1.5 kHz	2 kHz	3 kHz	4 kHz	6 kHz
G[80]	40	40	40	40	37	42	32	28	26
G[50]	42	45	48	48	44	52	42	35	30

*Settings in accordance with Aventa fitting software

DANALOGIC